


# SKYLIGHT CONSTRUCTION



Solar Innovations® offers three skylight assembly and delivery options.

1. KD skylights, or knocked down skylights, have virtually no design size limitation. These skylights are shipped with each part pre-manufactured, wrapped, and labeled. Each piece is prepared with applied clips, gaskets, and glazing tapes for ease of assembly and cost effective installation.
2. Pre-assembled, not pre-glazed skylights feature welded curbs and a pre-assembled frame which can be lifted or hoisted into place for factory assembled, water tight, and secure curb details. Installation time is reduced to installing only glass, exterior caps, fasteners, and finishing the exterior seals. Pre-assembled, not pre-glazed skylights require less expertise and time to install than the KD models offered.
3. Pre-assembled, pre-glazed skylights can be shipped up to eight foot by fifteen foot depending on the configuration, accessories, shipping method, and installation logistics. (Larger and modular options are available based on job specific criteria.) The skylight is shipped as complete as possible, requiring a crane to hoist or lift the skylight into place. Once in place, the skylight need only be fastened to the structure to complete the installation. This option provides the ultimate manufacturing control and the greatest ease of installation.

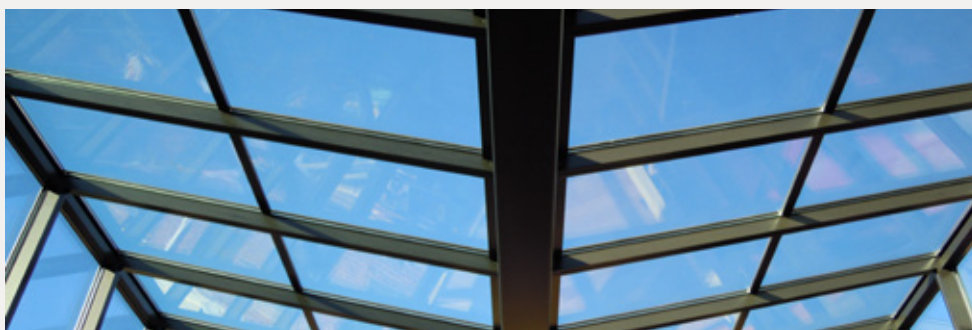

**Learn More**

To find out more about our Skylights, visit our website at [solarinnovations.com/our-products/aluminum-skylights](https://solarinnovations.com/our-products/aluminum-skylights).